

Outstanding Visibility with High Reliability

86XE3FS

Boasting a high brightness of 3,000 nits, LG's outdoor display, 86XE3FS, captures the attention of passersby even under direct sunlight. Carefully designed to withstand a variety of extreme changes in the environment, the display will stably deliver eye-catching content for as long as you need it to.



Great Titchfield St
Oxford Circus Stn ⇄

Keep on
traveling
Venice

Make your holiday dreams come true with us.

The advertisement is displayed on a large outdoor screen. The top of the screen has a red header with white text. The main content is a vibrant image of Venice, Italy, showing the St. Mark's Basilica and the Grand Canal with gondolas. The text is overlaid on the top half of the image.

* All images are for illustrative purposes only.

Outstanding Visibility with High Reliability

86XE3FS

OUTSTANDING VISIBILITY


High Brightness

With outstanding high brightness at 3,000 nits (Typ.), the 86XE3FS outdoor display delivers contents clearly while captivating passersby, making it the ultimate display for outdoor visibility.



Visible with Polarized Sunglasses

QWP (Quarter Wave Plate) enables clear visibility even when the viewer is wearing polarized sunglasses.

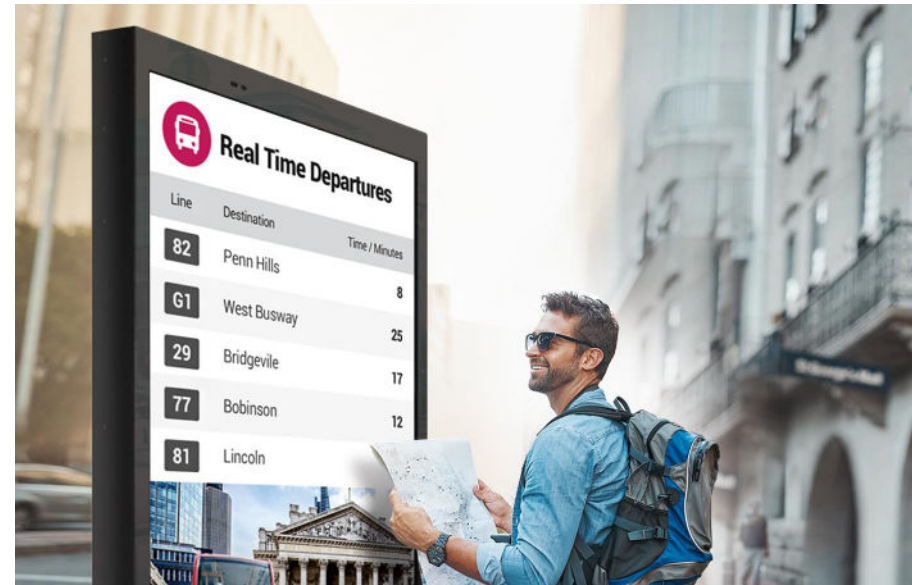


Outstanding Visibility with High Reliability

86XE3FS

OUTSTANDING VISIBILITY

Smart Brightness Compensation


The built-in BLU* sensor constantly measures the brightness of the display and automatically compensates for reduced brightness during operation.

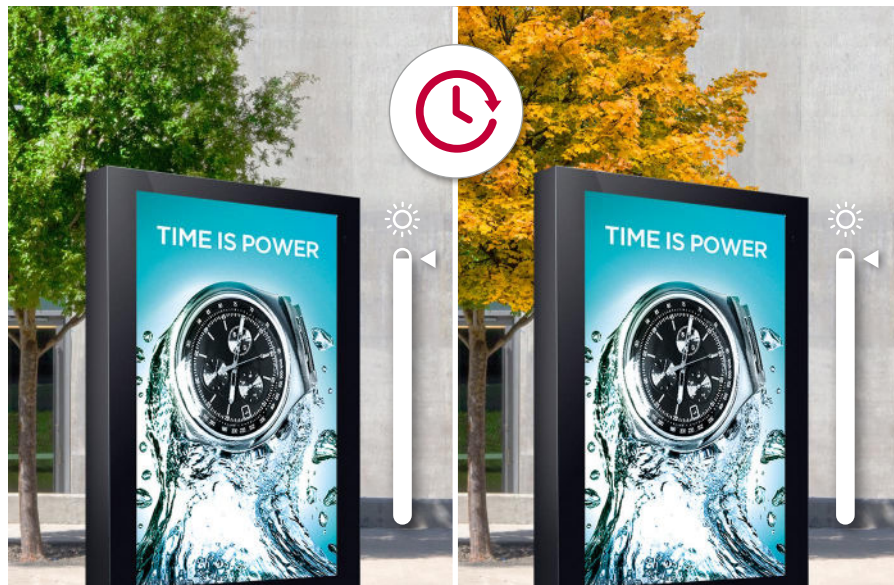

* Back Light Unit

Auto Brightness Control

The screen brightness is automatically adjusted depending on the ambient light. The brightness is increased in light for better visibility, while it is decreased in darkness for efficient power management.

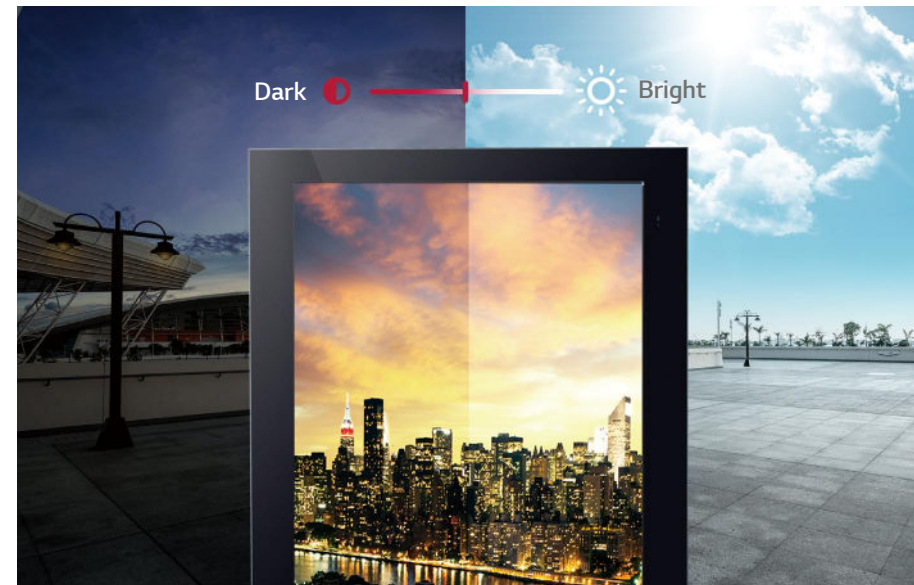

Auto Brightness

Outstanding Visibility with High Reliability

86XE3FS

RELIABILITY FOR OUTDOOR USAGE

Wide Range of Operating Temperature

The display offers superb reliability under a wide range of operating temperatures, which also goes through LG's solar-loading test which causes a lot of thermal energy. So the 86XE3FS requires fewer constraints for outdoor installations which are usually exposed to strong direct sunlight and various environmental changes.



* 86XE3FS is tested under humidity of 30% (55°C) and 99% (40°C).

Secured Protection with IP56 Design

The display is sealed with IP56* design for reliable operation. It's designed to be not only waterproof but also weatherproof against the damaging effects of the sun, rain, snow, dust and wind, an essential feature for outdoor application.



* IP Code or Ingress Protection Code classifies the degree of protection provided by mechanical casings and electrical enclosures against intrusion, dust, accidental contact, and water.

** IP56 means the product is protected from limited dust ingress and resists high-pressure, heavy spays of water.

*** 86XE3FS is certified as IP56 by CTK in May 2019.

Outstanding Visibility with High Reliability

86XE3FS

RELIABILITY FOR OUTDOOR USAGE

Electrical Safety

Circuit breaker is inside ensuring strong protection from overcurrent short circuits, and unwanted voltages. This type of integration establishes preventative solutions for signage's from having future damages.



Protective Glass

The tempered and laminated front glass ensures optimum protection from outdoor extremities, resulting in minimal to no damage from external impacts*.



* The image is for illustrative purposes only.

Without Protective Glass

With Protective Glass
(LG 86XE3FS)

* When 1,040g of iron is dropped from a height of 60cm, the front protective glass should not be broken or cracked while normal glass can be broken or cracked by the same level of impacts.


Outstanding Visibility with High Reliability

86XE3FS

SMART PERFORMANCE

webOS Smart Platform

Quad Core SoC (System-on-Chip) can execute several tasks at the same time without a separate media player. In addition, webOS 3.0 platform enhances user convenience with intuitive UI and simple app development tools.

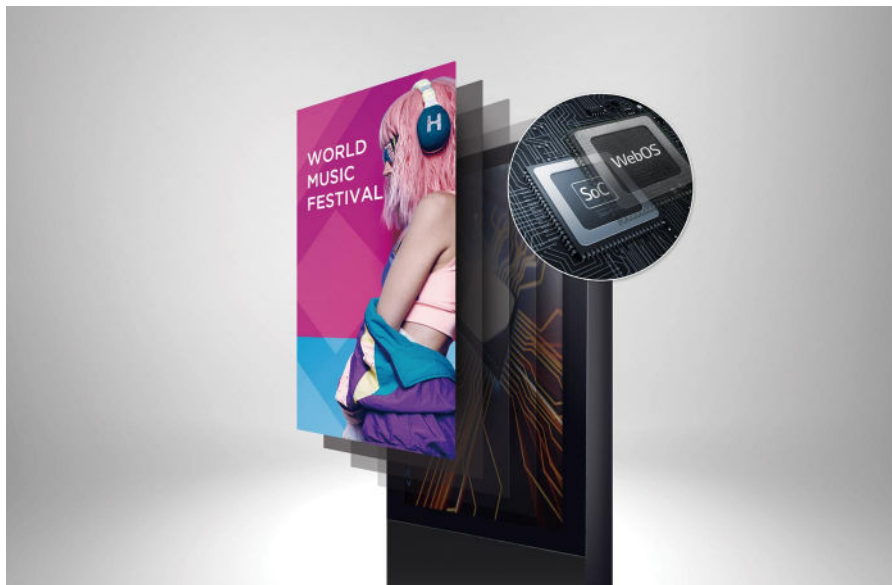

Web Monitoring


The LG Control Manager*, the embedded web monitoring program, allows a variety of parameters to be diagnosed in real time such as temperature, pixel, door, ambient light, and gyro sensors. It can be easily controlled at all times.




* Enabled by wired LAN connection

Dimension (unit: mm)

86"

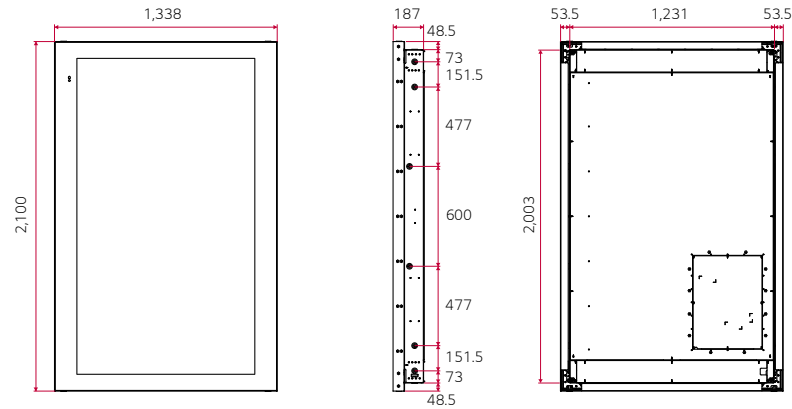

Connectivity

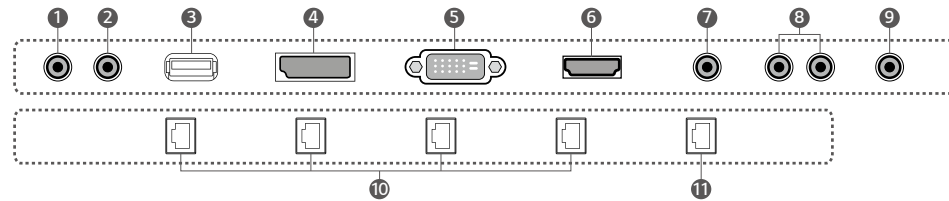

- 1 RS232C OUT
- 2 RS232C IN
- 3 USB 2.0
- 4 DP IN
- 5 DVI-D IN
- 6 HDMI IN
- 7 AUDIO IN
- 8 SPEAKER OUT
- 9 EXT IR IN
- 10 LAN OUT
- 11 LAN IN



* Dimensions & Jack Panels (Read / Side) may differ from the above image, so please contact LG sales team to verify before ordering.

Specifications

86XE3FS

PANEL	Screen Size	86"	
	Panel Technology	IPS, RGB	
	Native Resolution	3,840 × 2,160 (UHD)	
	Brightness	3,000 nit (Typ.), 2,800 nit (Min.)	
	Contrast Ratio	1,200 : 1 (Typ.)	
	Dynamic CR ¹⁾	500,000 : 1	
	Color Gamut	NTSC 68 %	
	Viewing Angle (H × V)	178 × 178	
	Color Depth	1.07 Billion Colors (10 bit)	
	Response Time	8 ms (G to G)	
	Surface Treatment (Haze)	Haze 3 %	
	Operation Hours (Hours / Day)	24 / 7	
Portrait / Landscape	Yes / Yes		
QWP (Quarter Wave Plate)	Yes		
CONNECTIVITY	Input	HDMI (HDCP 2.2), DP (HDCP 1.4), DVI-D, Audio, USB 2.0 Type A	
	Output	External Speaker (L/R, 10 W + 10 W)	
	External Control	RS232C In (4 Pin Phone Jack) / Out, RJ45 (LAN) In, RJ45 (LAN) Out (4), IR In	
MECHANICAL SPECIFICATION	Bezel Width	101 mm (T/B), 135 mm (L/R)	
	Weight (Head)	276 kg	
	Packed Weight	310 kg	
	Monitor Dimension (W x H x D)	1,338 × 2,100 × 187 mm	
	VESATM Standard Mount Interface	No	
Protection Glass	Depth	9.52 mm (4 mm (Glass) + 1.52 mm (Lami) + 4 mm (Glass))	
	Degree of Protection	Yes (P2A Certified)	
KEY FEATURE	Internal Memory (8 GB), Temperature Sensor, Auto Brightness Sensor, Pixel Sensor, Current Sensor, BLU Sensor, Humidity Sensor, Acceleration (Gyro) Sensor, Power Indicator, FAN, webOS 3.0, Embedded CMS (Local Contents Scheduling), USB Plug & Play, Fail Over, Background Image (Booting Logo Image, No Signal Image), Sync Mode (RS-232C Sync, Local Network Sync), Video Tag (2), Rotation (Screen Rotation, External Input Rotation), Gapless Playback, Tile Mode Setting (Max. 15 × 15), Setting Data Cloning, SNMP, ISM Method, Auto Set ID, Status Mailing, Control Manager, Smart Energy Saving, PM Mode, Wake on LAN, HDMI-CEC ²⁾ , SI Server Setting, Brightness Compensation		
	ENVIRONMENT CONDITIONS	Operation Temperature	-30°C to 50°C
		Operation Humidity	5% to 100%
		Power Supply	AC 100-240 V ~, 50/60 Hz
	POWER	Power Type	Built-in Power
		Power Consumption	Typ. / Max. 1,450 W / 1,850 W
			BTU (British Thermal Unit) 4,948 BTU / Hr (Typ.), 6,312 BTU / Hr (Max.)
	CERTIFICATION	Safety	CB / NRTL
		EMC	FCC Class "A" / CE / KC / VCCI
		ErP	Yes (EU Only)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No	
SOFTWARE COMPATIBILITY	SuperSign CMS, SuperSign Control / Control+, LG ConnectedCare ³⁾		
ACCESSORIES	Basic	Remote Controller, HDMI Cable, USB Cable, Manual (IG & EIG), Regulation Book, Phone to RS232C Gender, LAN Extension Cable Cord Grip Rubber (3 ea)	
SPECIAL FEATURE	IP Rating (IP56), Power Protection (Circuit Breaker), Direct Sunlight		

¹⁾ The luminosity ratio of Full Black / Full White color on video input condition.

²⁾ Compatibility may differ by equipment.

³⁾ The availability can differ by region.

* Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.



Download
LG C-Display+
Mobile App

Google Play Store

- www.lg.com/global/business/information-display
- www.youtube.com/c/LGECCommercialDisplay
- www.facebook.com/LGInformationDisplay
- www.linkedin.com/company/lginformationdisplay
- twitter.com/LG_ID_HQ

LG may make changes to specifications and product descriptions without notice.
Copyright © 2022 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.

