# XS series

Easily installed in store windows, LG's XS series of window facing digital signage captivates customers with its vivid image quality and quiet operation.

The XS series helps businesses enhance their store's brand image while enriching the customers' shopping experience.





# XS series

# **Outstanding Visibility**



#### **High Brightness**

With a great brightness of 2,500 cd/m², XS series clearly delivers contents and attracts public attention, which is the ultimate display for outdoor visibility.



### Visible with Polarized Sunglasses

QWP<sup>(Quarter Wave Plate)</sup> enables clear visibility even when the viewer is wearing polarized sunglasses.




## XS series

## **Quiet Operation**



#### Fan-less Design

By eliminating the need for a cooling fan, we have made the XS series an ideal choice for the in-window environment. Its operating noise level is under 25dB, which is quieter than that of daily conversation.

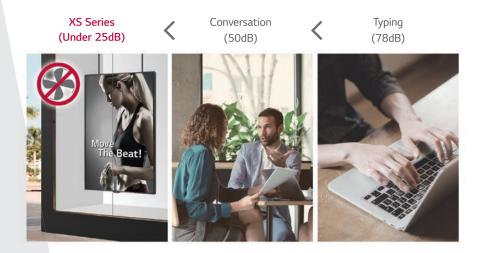

## **Space Efficiency**



#### Slim Design

Thanks to its thin depth, the XS series takes up less space, which leads to space efficiency in an in-window environment.




## XS series

#### **User Convenience**



#### webOS Smart Platform

Quad Core SoC<sup>(System-on-Chip)</sup> can execute several tasks at the same time without a separate media player. In addition, webOS 3.0 platform enhances user convenience with intuitive UI and simple app develoment tools.

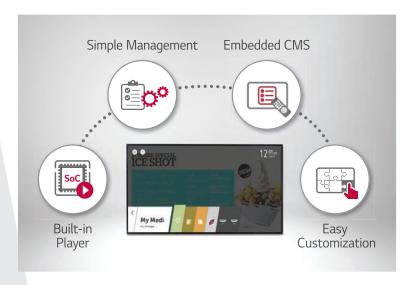


## **Smart Brightness Control**

The screen brightness is automatically adjusted depending on the ambient light. The brightness is increased in light for better visibility, while it is decreased in darkness for efficient power management.




Auto Brightness

#### **Dimension** (unit: mm)

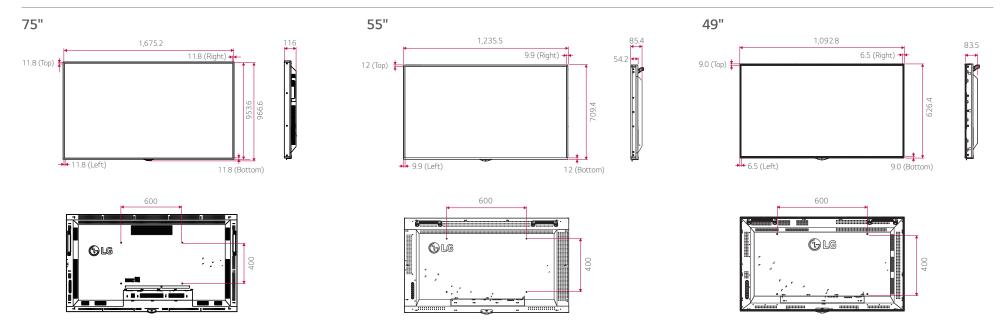

## **Connectivity**

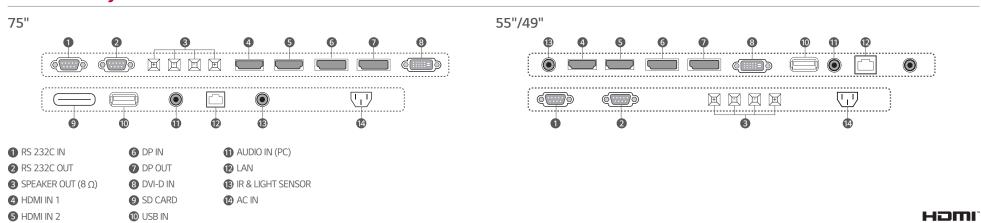

# Specifications 75XS2E 55XS2E 49XS2E

PANEL	Screen Size	75" (74.52" Measured Diagonal)	55" (54.64" Measured Diagonal)	49" (48.50" Measured Diagonal)
	Panel Technology	IPS, M+ (WRGB)	IPS, M+ (WRGB)	IPS, M+ (WRGB)
	Aspect Ratio	16:9	16:9	16:9
	Native Resolution	3,840 x 2,160 (UHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness	2,500 cd/m <sup>2</sup> (Typ.), 2,250 cd/m <sup>2</sup> (Min.)	2,500 cd/m <sup>2</sup> (Typ.), 2,250 cd/m <sup>2</sup> (Min.)	2,500 cd/m² (Typ.), 2,250 cd/m² (Min.)
	Contrast Ratio (Typ.)	1,200:1	1,000:1	1,000:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Surface Treatment	Haze 3%, QWP	Haze 3%, QWP	Haze 3%, QWP
	Lifetime	50,000 Hrs	50,000 Hrs	50,000 Hrs
	Operation Hours	24 Hrs	24 Hrs	24 Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
	Input	HDMI(2), DP, DVI-D, Audio, USB, SD Card	HDMI(2), DP, DVI-D, Audio, USB	HDMI(2), DP, DVI-D, Audio, USB
	Output	DP, External Speaker (L/R)	DP, External Speaker (L/R)	DP, External Speaker (L/R)
	External Control	RS232C In/out, RJ45 In, IR Receiver In	RS232C In/out, RJ45 In, IR Receiver In	RS232C In/out, RJ45 In, IR Receiver In
PHYSICAL SPECIFICATION	Bezel Color	Black	Black	Black
	Bezel Width	11.8 mm (Even)	12.0 mm (T/B), 9.9 mm (L/R)	9 mm (T/B), 6.5 mm (L/R)
	Monitor Dimension (W x H x D)	1,675.2 x 953.6 x 116 mm	1,235.5 x 709.4 x 85.4 mm	1,092.8 x 626.4 x 83.5 mm
	Weight (Head)	43 kg	24.7 kg	20.2 kg
	Carton Dimensions (W x H x D)	1,816 x 1,106 x 285 mm	1,344 x 215 x 820 mm	1,194 x 175 x 760 mm
	Packed Weight	52.2 kg	29.9 kg	24.7 kg
	Handle	Yes (2ea)	Yes (2ea)	Yes (2ea)
	VESA™ Standard Mount Interface	600 x 400 mm	600 x 400 mm	600 x 400 mm
PECIAL EATURES			s), Wi-Fi Dongle Ready, Temperature Sensor, Auto Brightness Sensor, Smart Energy It Rotation, Tile Mode (Up to 15x15), Firmware Update by Network, SNMP, ISM Mo	
NVIRONMENTAL	Operation Temperature <sup>2)</sup>	0°C to 40°C	0°C to 45°C	0°C to 45°C
ONDITIONS	Operation Humidity	10% to 85%	10% to 80%	10% to 80%
POWER	Power Type	Built-In Power	Built-In Power	Built-In Power
	Power Supply	100-240V~, 50/60Hz	100-240 V-, 50/60 Hz	100-240V~, 50/60Hz
	Power Typ. / Max.	585 W / 600 W	240 W / 270 W	200 W / 240 W
	Consumption Smart Energy Saving	280 W	120 W	100 W
STANDARD (CERTIFICATION)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC / VCCI	FCC Class "A" / CE / KC / VCCI	FCC Class "A" / CE / KC / VCCI
	ErP / Energy Star	No / No	No / No	No / No
DFTWARE	Content Management Software	SuperSign CMS	SuperSign CMS	SuperSign CMS
COMPATIBILITY <sup>3)</sup>	Control and Monitoring Software	SuperSign Control / Control+	SuperSign Control+	SuperSign Control+
ACCESSORIES	Basic	Remote Controller, Power Cord, HDMI Cable, Manual (ESG/EIG), IR Receiver (w/ Ambient Light Sensor)	Remote Controller, Power Cord, HDMI Cable, Manual (ESG/EIG), IR Receiver (w/ Ambient Light Sensor)	Remote Controller, Power Cord, HDMI Cable, Manual (ESG/EIG), IR Receiver (w/ Ambient Light Sensor)
	Optional	Wall Mount (LSW630), Wi-Fi Dongle (AN-WF500)	Landscape Wall Mount (WM-L640V), Portrait Wall Mount (WM-P640V), Wi-Fi Dongle (AN-WF500)	Landscape Wall Mount (WM-L640V), Portrait Wall Mount (WM-P640 Wi-Fi Dongle (AN-WF500)

<sup>1)</sup> Compatibility may differ by equipment. 2) Without direct sunlight or with cooling systems in direct sunlight. 3) Software compatibility may change over time. Please contact your regional LG sales representative for details.



www.lg.com/b2b

• www.youtube.com/c/LGECommercialDisplay

www.facebook.com/LGInformationDisplay

in www.linkedin.com/company/LGInformationDisplay

LG may make changes to specifications and product descriptions without notice.

Copyright © 2018 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.

The names of products and brands mentioned here may be the trademarks of their respective owners.

